


# MB920 PCB Terminal Block, Modular




## DIMENSIONS/POSITIONS

## MB920-952M

間距	Pitch	9.52mm
位數	Poles	2 ~ 3Poles
塑膠本體	Housing Material	PA 66
壓線圈	Cage Clamp	Steel, Ni Plated
端子	Contact	Brass, Tin Plated
螺紋	Screw Thread	M3.0, Steel, Zinc Plated
電線線徑	Wire Size	10 ~ 24AWG
剝線長度	Wire Strip Length	8mm
PCB孔徑	PCB Hole Diameter	1.7mm
最大緊固扭矩	Tightening Torque, Max.	9.0 Lb-in
環境作業溫度	Operating Temperature	-40°C to +105°C

## TECHNICAL DATA

連接符合標準	Connection in acc. with standard EN-VDE	
額定電流 I <sub>n</sub>	Nominal Current I <sub>n</sub>	25A
額定橫截面	Nominal Cross Section	6.0mm <sup>2</sup>
最大負載電流	Maximum load current	25A
絕緣材料	Insulating Material	PA
阻燃等級,符合UL94 Inflammability class acc. to UL94		V0
額定電壓,UL/CUL Nominal voltage, UL/CUL		600V
額定電流,UL/CUL Nominal current, UL/CUL		30A

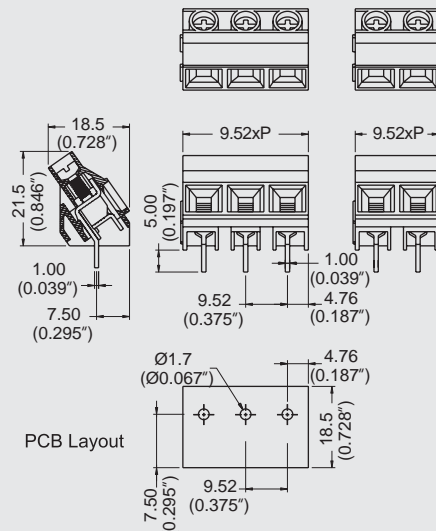

Note:  
Screw Plating: Changes are available upon request  
Cage Clamp: MB922: Brass